

SOS® Passive Skimmers

For Low Recovery Wells


The QED family of Passive Skimmers has been designed for free product recovery applications in sites where active pumping systems are not applicable due to existing conditions or extreme low permeability formations. The floating intake head follows the groundwater fluctuations in the recovery well, allowing only the free-floating phase (LNAPL) to be captured, without taking water, and stored in the built-in reservoir for further manual transfer to a tank.

Passive Skimmers are available for 2" (50 mm) and 4" (100 mm) extraction wells, with different reservoir capacities.

Advantages

1. Simple systems for extreme low recovery applications.
2. Inexpensive option if active system is not practical.



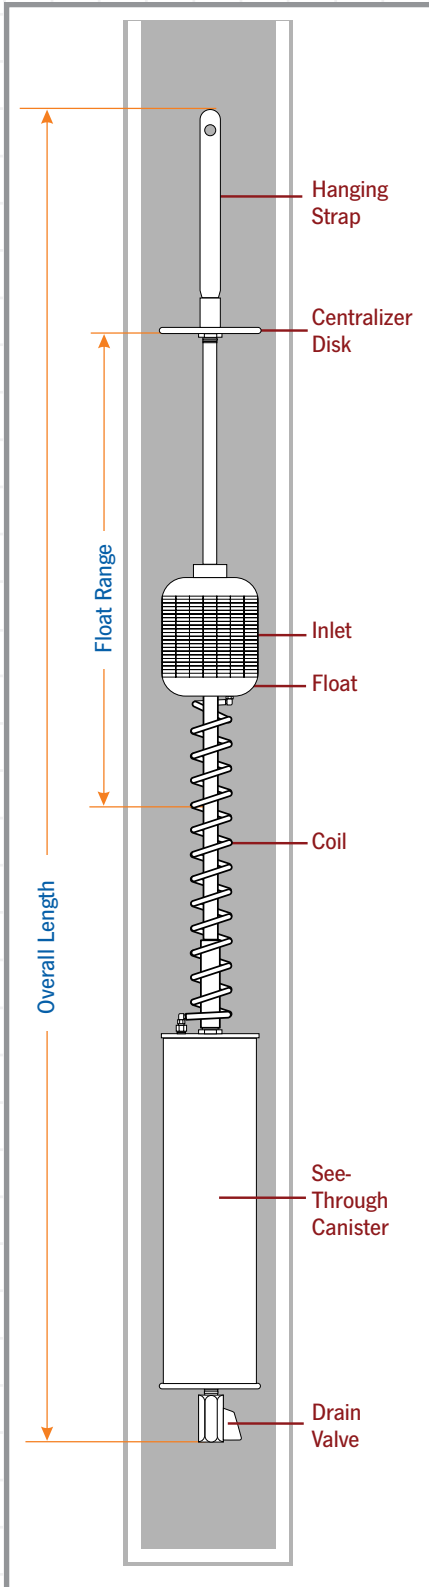

Specifications

Model No.	2 in. SOS 301079	2 in. SOS 301080	4 in. SOS 301032	4 in. SOS 301033
Canister Volume	20 oz. (600 cc)	30 oz. (900 cc)	101 oz. (3,000 cc)	203 oz. (6,000 cc)
Well Diameter	2 in. (5 cm)	2 in. (5 cm)	4 in. (10 cm)	4 in. (10 cm)
Float Travel Range	12 in. (30 cm)	12 in. (30 cm)	18 in. (46 cm)	18 in. (46 cm)
Overall Length	65 in. (165 cm)	48 in. (122 cm)	119 in. (302 cm)	11 in. (28 cm)

LNAPL Fluid Density	< 1.0 SG
Kinematic Viscosity @ 50 °F (10 °C)	200 centistokes
Recommended Initial LNAPL Layer	> .25 in. (> .64 cm)
Residual LNAPL Layer	0.25 in. (.64 cm)
Suitable Types of LNAPL	Gasoline, jet fuel
Materials	Stainless steel, Viton®, PVC, brass, closed cell foam.

Viton is registered trademark of DuPont Dow Elastomers.



Characterize Your Specific Site

The QED Test Kit enables you to measure the density and viscosity of your actual floating hydrocarbon layer. This FREE, do-it-yourself kit comes complete with simple, illustrated instructions. Once you have recorded the results of your hydrocarbon test, QED application specialists will be able to provide expert technical assistance in system design and specification.