


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF QED ENVIRONMENTAL. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF QED ENVIRONMENTAL IS PROHIBITED.

REVISIONS

REV.	DESCRIPTION	ECO #	DRAWN BY	CHECKED BY	DATE
-	RELEASED FOR PRODUCTION	3952	TR	-	8/16/2017

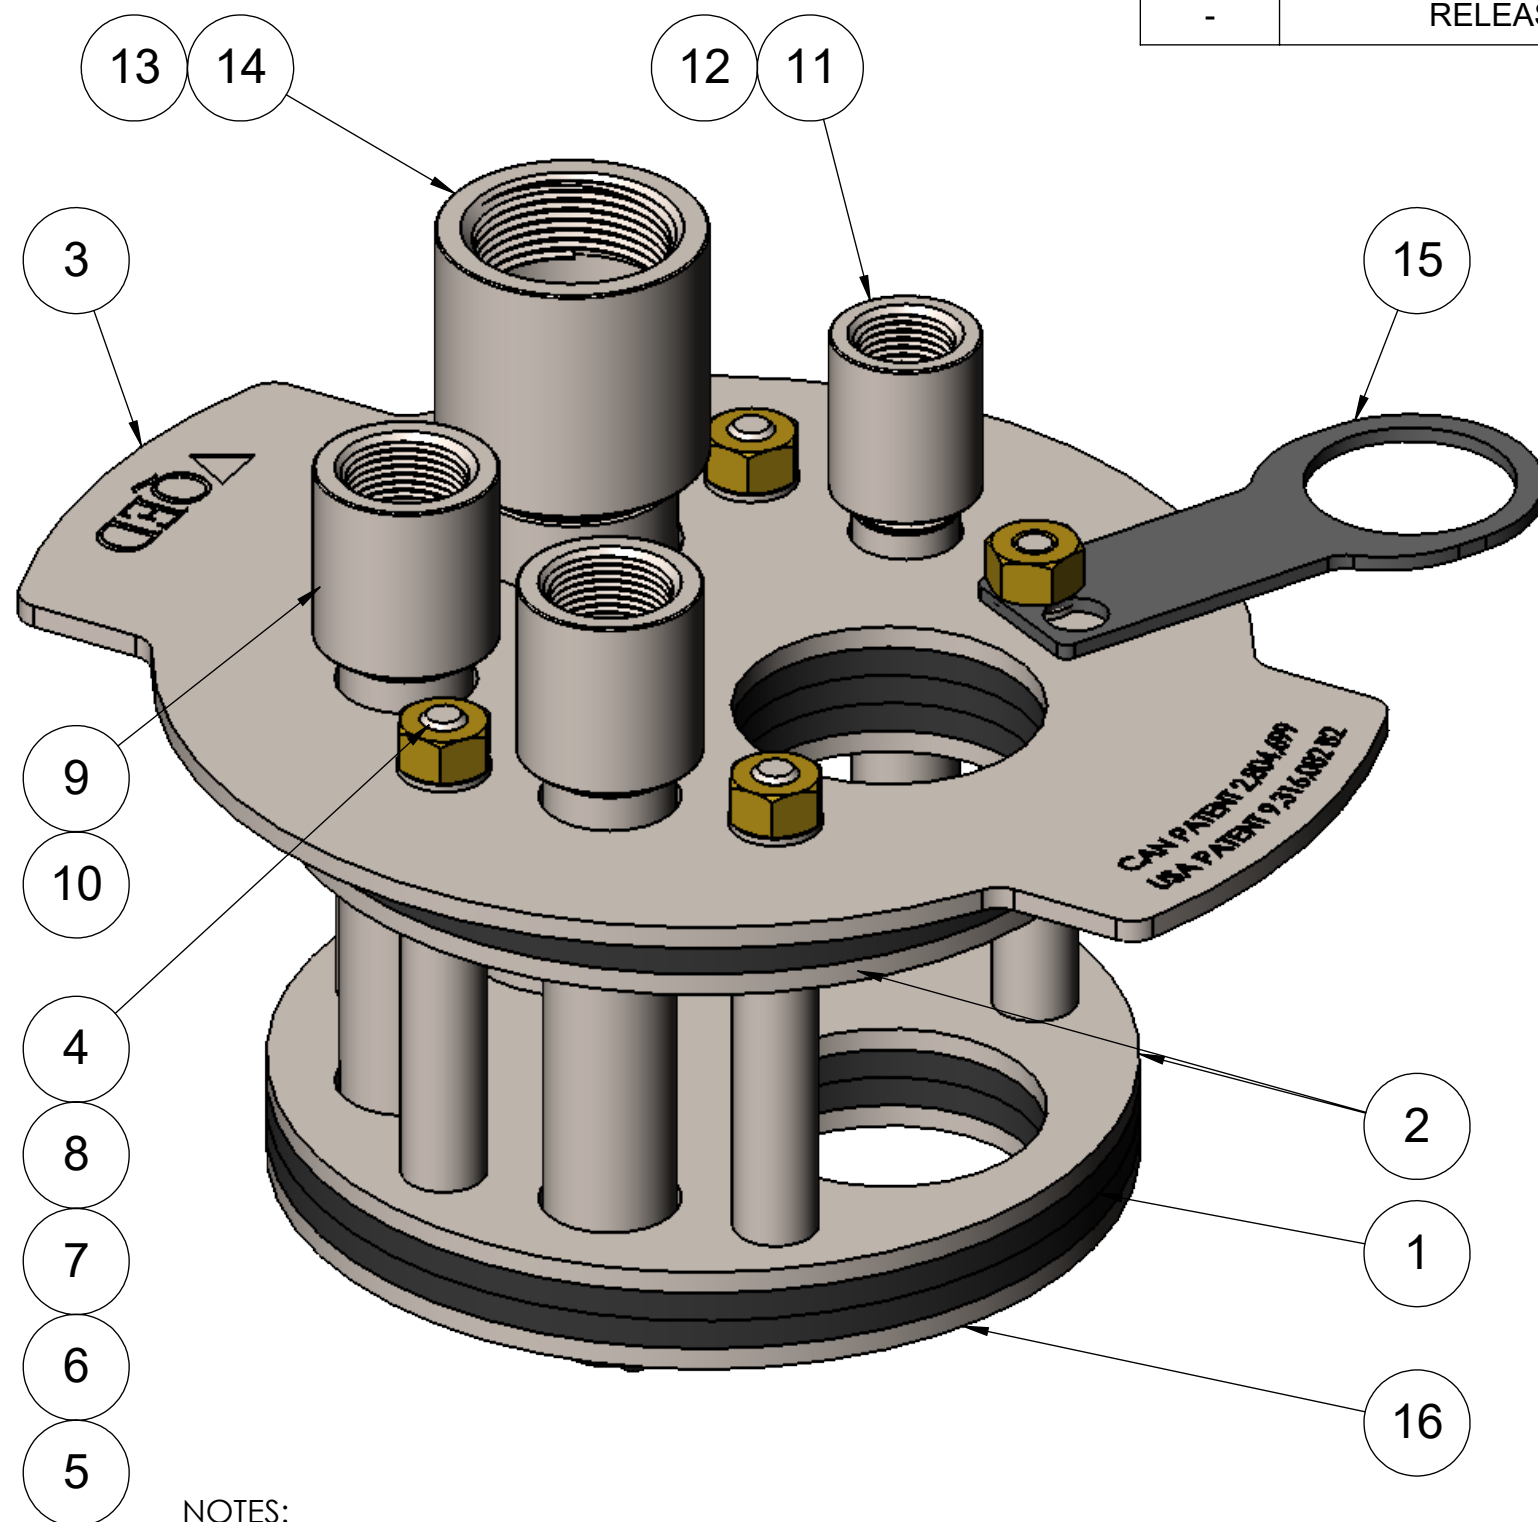

ITEM	PART #	DESCRIPTION	QTY
1	DR11-825-8-GA	DR11-825-8-GA 8IN WELL SEAL GASKET	5
2	DR11-825-8-CP	DR11-825-8-CP 8IN WELL SEAL CLAMP PLATE	2
3	DR11-825-8-TP	DR11-825-8-TP 8IN TOP PLATE	1
4	CB38	Carriage Bolt	5
5	RW38	Retaining Washer	5
6	S38	Spacer	5
7	W38	Flat Washer 3/8	5
8	N38	Hex Nut 3/8-16 Brass	5
9	COUP-SS-75	3/4in NPT Coupling	2
10	P-SS40-75-TBE	3/4in NPT-M Port	2
11	COUP-SS-50	150 LBS 304 SS 1/2" COUPLING	1
12	P-SS40-50-TBE	1/2in NPT-M Port	1
13	P-SS40-125-TBE	SCH 40 304 SS 1-1/4" X 6" NIPPLE	1
14	COUP-SS-125	1-1/4in NPT Coupling	1
15	41406	BRACKET, FILTER/REG. NAW 3000	1
16	41415	8" DR11 2" GAS CLAMP PLATE AND SUSPENSION HOOK WELD	1


NOTES:

1. TEFLON TAPE ALL PIPE THREADED JOINTS
2. TIGHTEN THE HEX NUTS DOWN JUST ENOUGH SO THE NIPPLES DO NOT MOVE.
3. RETAINING WASHER IS PLACED BETWEEN THE BOTTOM PLATE AND THE LOWEST RUBBER GASKET.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND INCLUDE PLATING REMOVE ALL BURRS

TOLERANCES
 XX +/- .01 FRACT +/- 1/64
 XXX +/- .005 ANGLES +/- 1/2
 OTHER TOLERANCES
 AS SPECIFIED

DRAWN BY	TR	DATE	08-15-17
CHECKED BY	-	DATE	-
APPROVED BY	-	DATE	-
NEXT ASSY	-	MATERIAL	-
USED ON	-	FINISH	-



2355 BISHOP CIRCLE W, DEXTER, MI. 48130

TITLE
8" DR11 WELL BASE CAP WITH 2" GAS PORT

DWG. NO. 825-DR11-BASE

SCALE 1:4 SHEET 1 OF 1 REV. -