


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Q.E.D. ENVIRONMENTAL ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF Q.E.D. ENVIRONMENTAL IS PROHIBITED.


REVISIONS

REV.	DESCRIPTION	ECO #	DRAWN BY	CHECKED BY	DATE
-	INITIAL RELEASE	4036	TR	-	2/7/2018
A	ITEM #9 WAS NYLON CAMSOCKET TYPE, NIPPLE AND ELBOW FOR THAT PORT REMOVED	4241	TR	-	8/14/2018
B	39227 WAS 202868	4311	MTM	-	10/24/2018

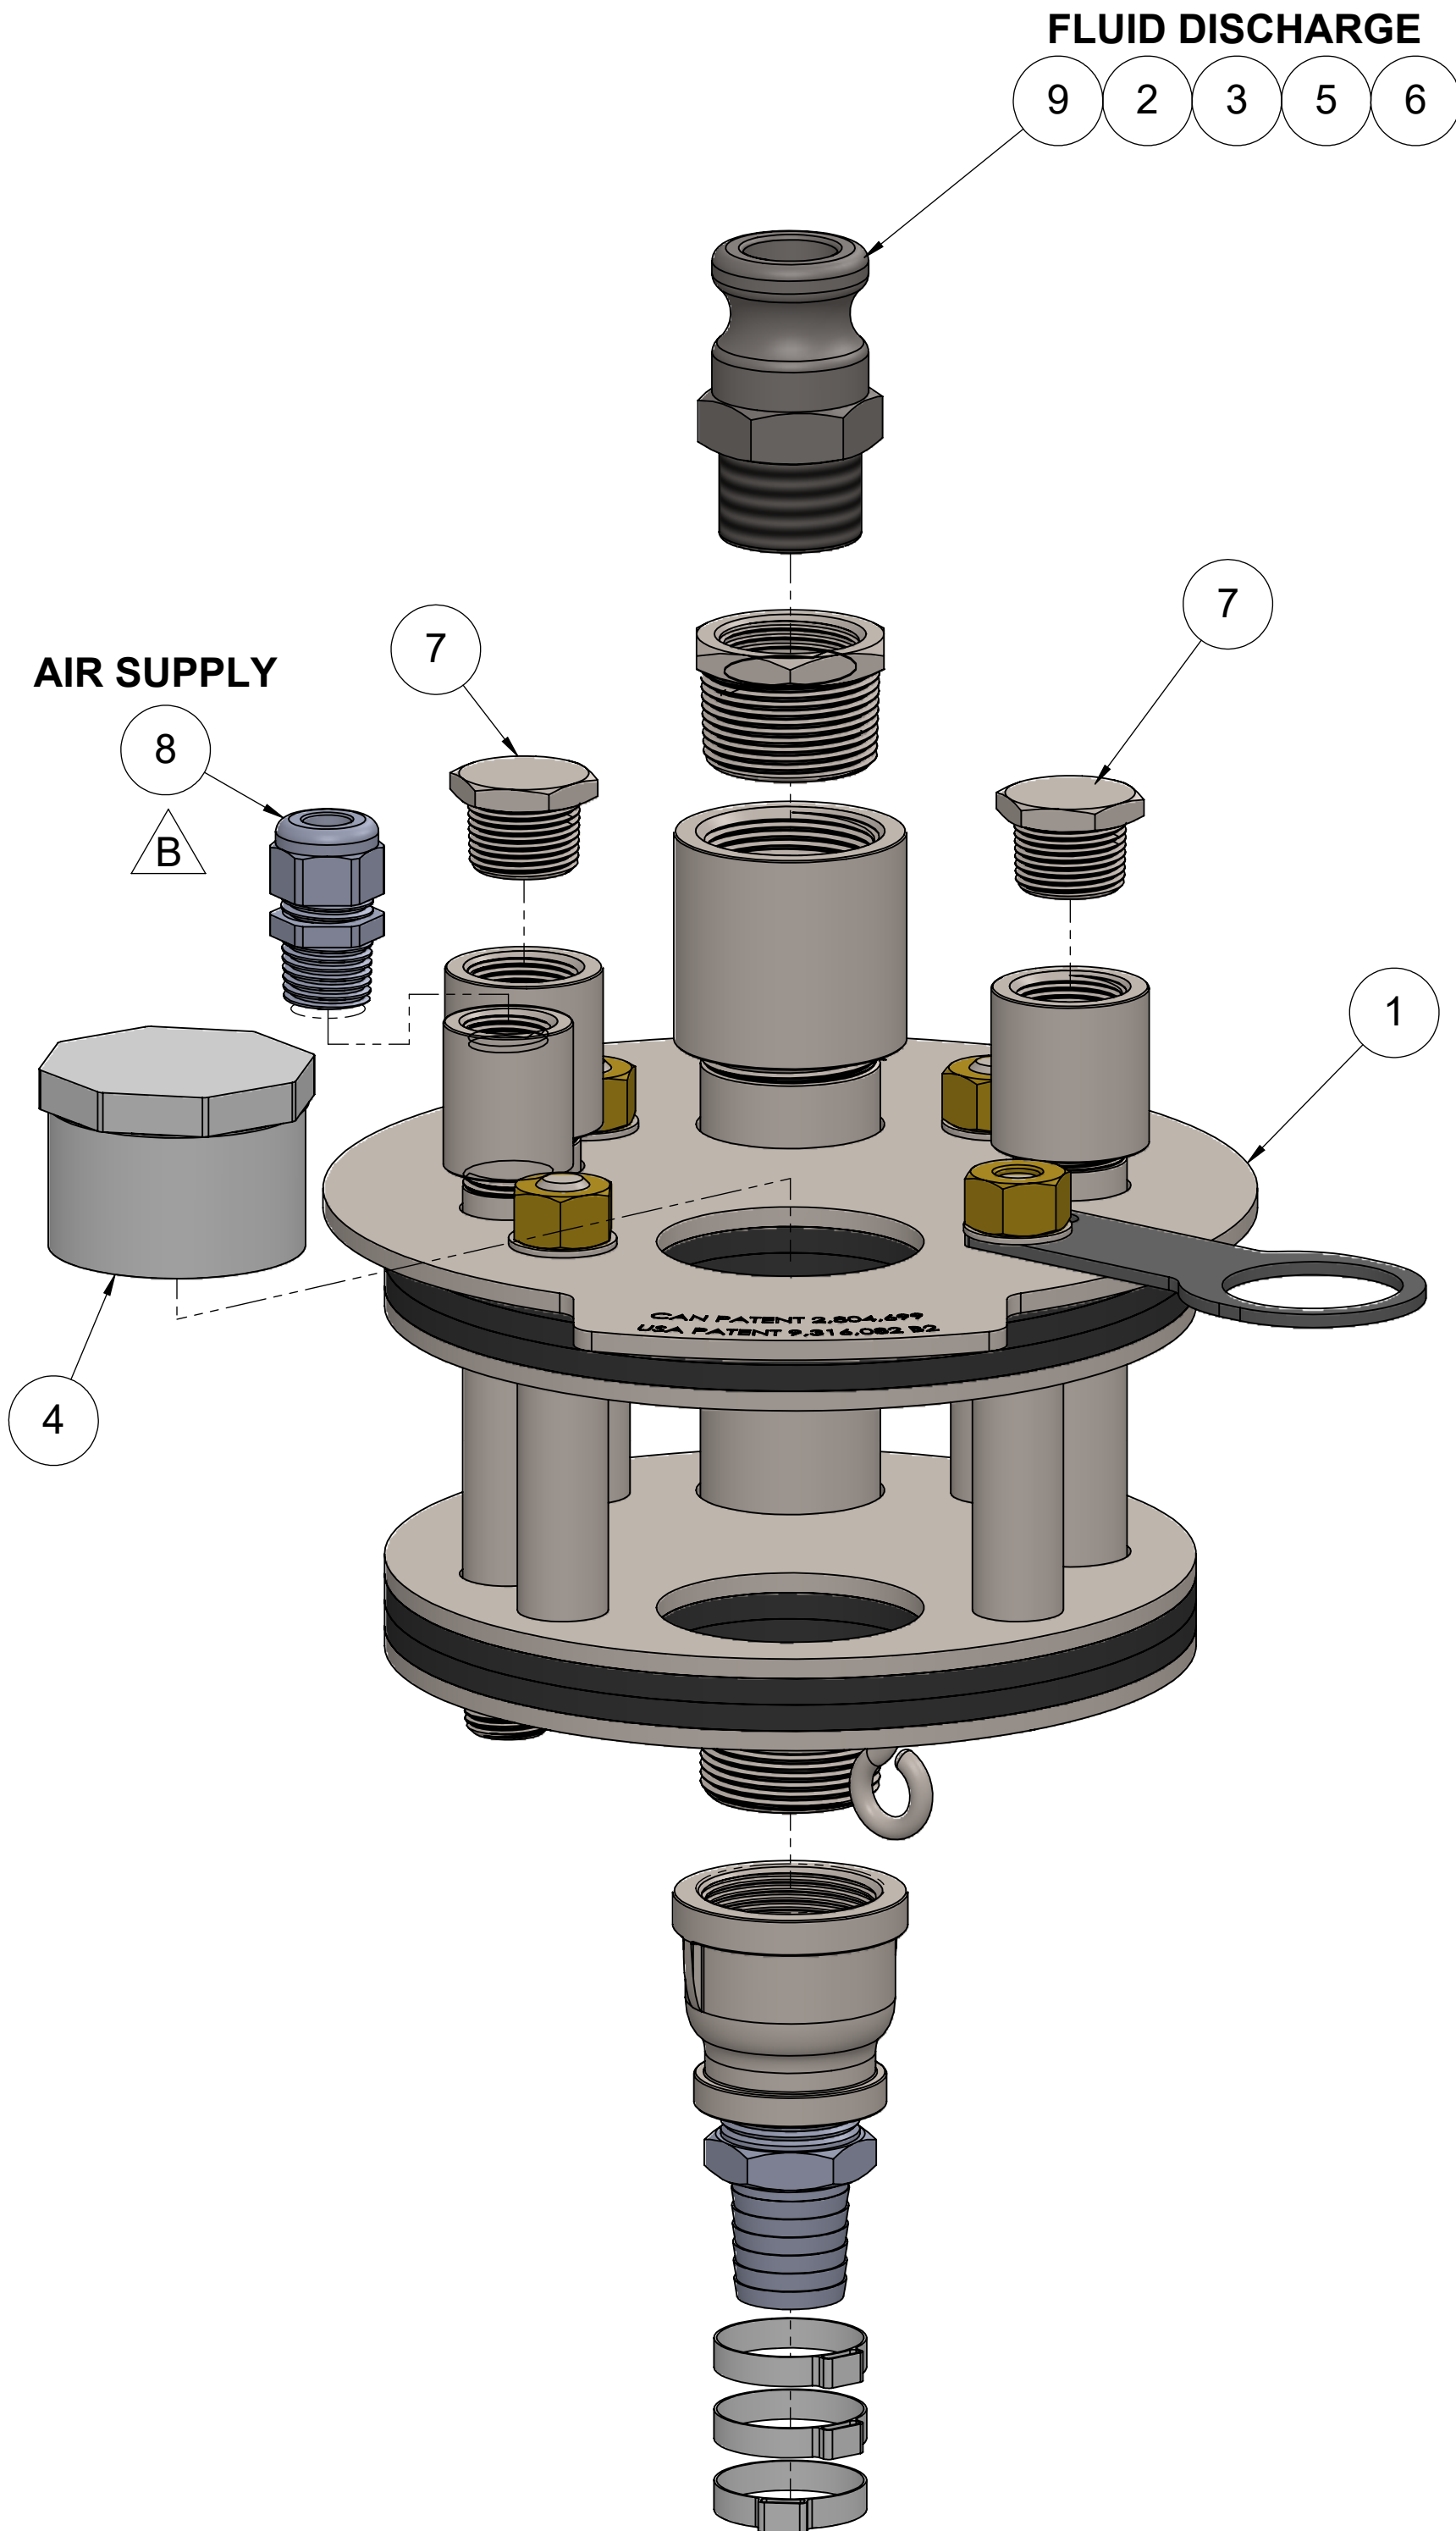

ITEM	PART #	DESCRIPTION	QTY.
1	825-80-BASE	8" SCH 80 OR DR17 WELL BASE CAP	1
2	RB-SS-125-100	REDUCING BUSHING 1-1/4 X 1 304SS	1
3	RC-SS-125-100	RED. COUPLING 1-1/4 TO 1IN	1
4	204372	PLUG 2" SPG SCH 40 PVC	1
5	205583	BARB 1" x 1" MPT S.S.	1
6	39360	CLAMP, 1-EAR FOR 1-1/4" TUBING	3
7	PLUG-SS-75	3/4in NPT-M Plug	2
8	39227	COMP .230 -.546 X 1/2" MPT LT NYLON	1
9	40090	ADAPTER, 1" MPT "F" TYPE CAM LOCK SS	1


△ B  
△ A

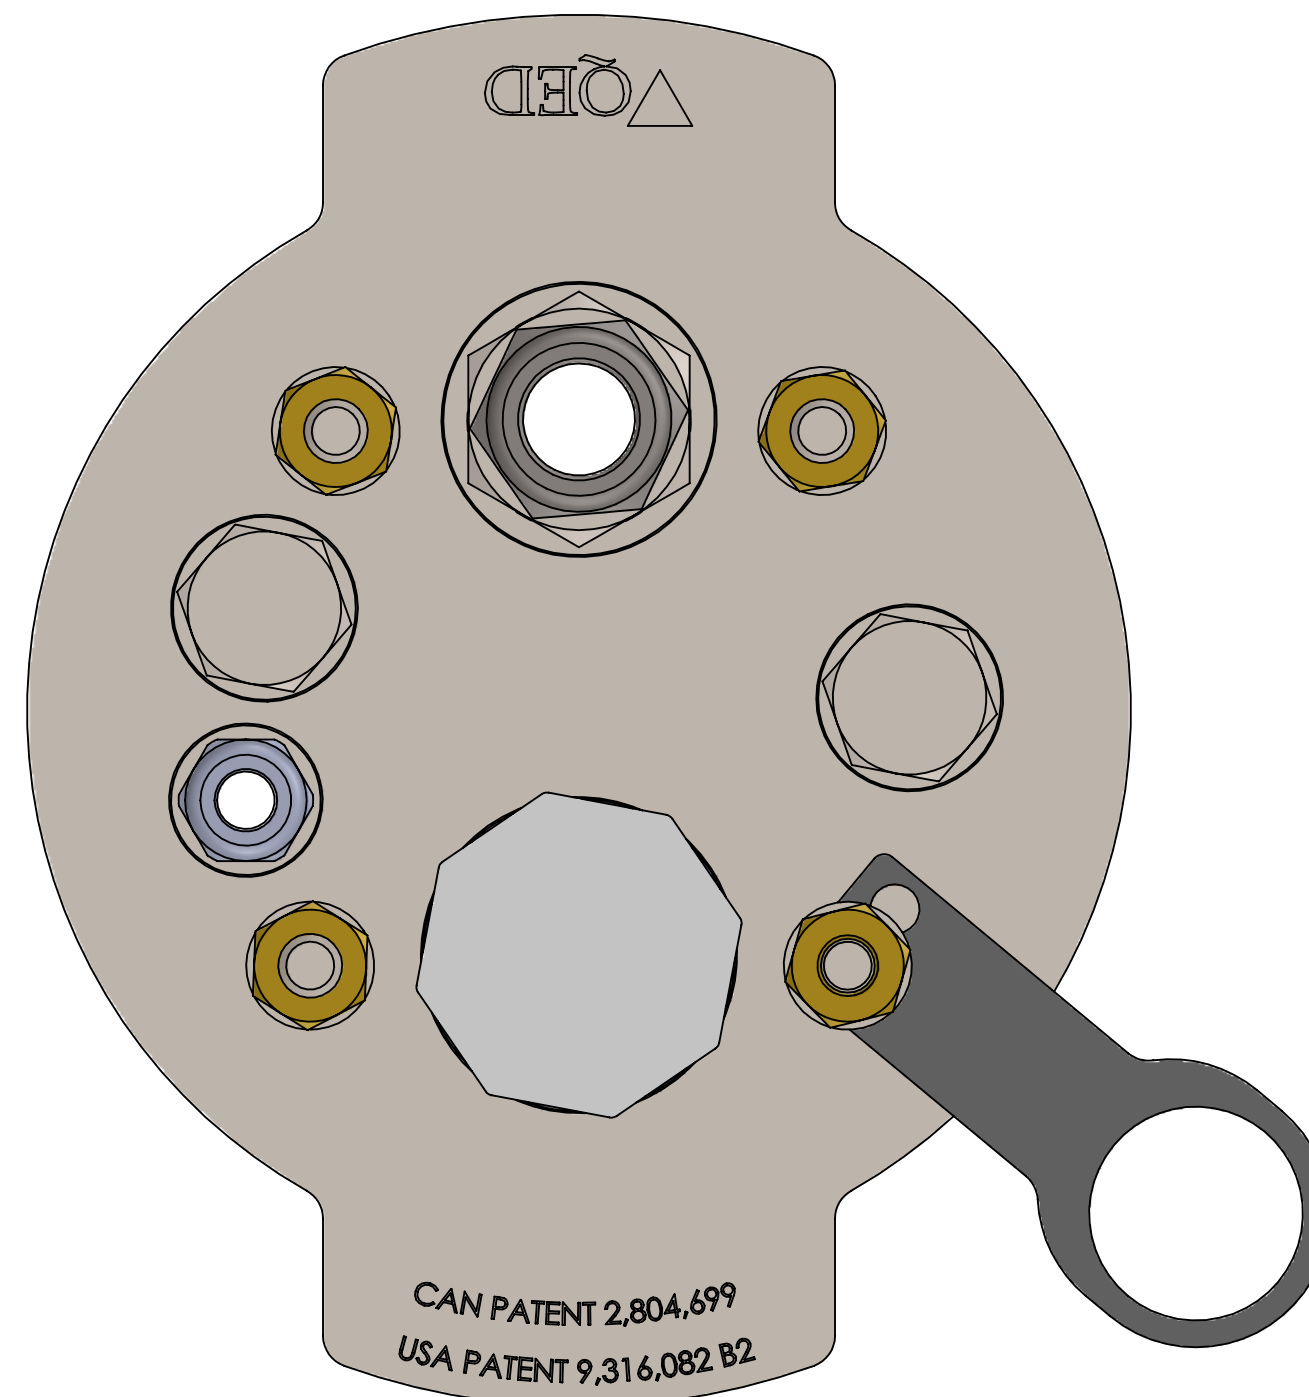

AS ASSEMBLED

NOTE:

1. TEFLON TAPE ALL PIPE THREADED JOINTS.
2. CLAMPS ARE PLACED IN A PLASTIC BAG AND SHIP TOGETHER

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND INCLUDE PLATING REMOVE ALL BURRS	DRAWN BY <b>TR</b>	DATE <b>02-07-18</b>	 <b>2355 BISHOP CIRCLE W, DEXTER, MI. 48130</b>
	CHECKED BY -	DATE -	
TOLERANCES XX +/- .01 FRACT +/- 1/64 XXX +/- .005 ANGLES +/- 1/2 OTHER TOLERANCES AS SPECIFIED	APPROVED BY -	DATE -	TITLE <b>8" WELL SEAL, SCH 80, DR17 &amp; DR21, EXH IN, 1 CAMPLUG, &amp; 1/2 C F</b>
NEXT ASSY -	MATERIAL -	DWG. NO. <b>AP308223</b>	REV. <b>B</b>
USED ON -	FINISH -	SCALE <b>1:4</b>	SHEET <b>1 OF 1</b>