

HAND-HELD NATURAL GAS LEAK DETECTION INSTRUMENT



The METREX instrument is ATEX certified and designed for pre-localisation, localisation and classification of natural gas leaks in gas distribution networks


FEATURES

- EN 60079-29 performance certified
- 50% lighter than legacy model
- Simple menu and operation
- Easy to read LCD display
- Adjustable gas thresholds
- Onboard data logging
- Integrated Bluetooth and GPS
- Compliance reporting with PROSoft
- Low maintenance and calibration costs
- IP65 rated

APPLICATIONS

- Emergency Services
- Leak detection in natural gas distribution networks
- Bar hole gas measurement
- Purging gas lines
- Enclosed space monitoring

Ideal for first responder technicians handling suspected gas leaks. Robust design and easy to use interface. Automatically scales to PPM / LEL / VOL.

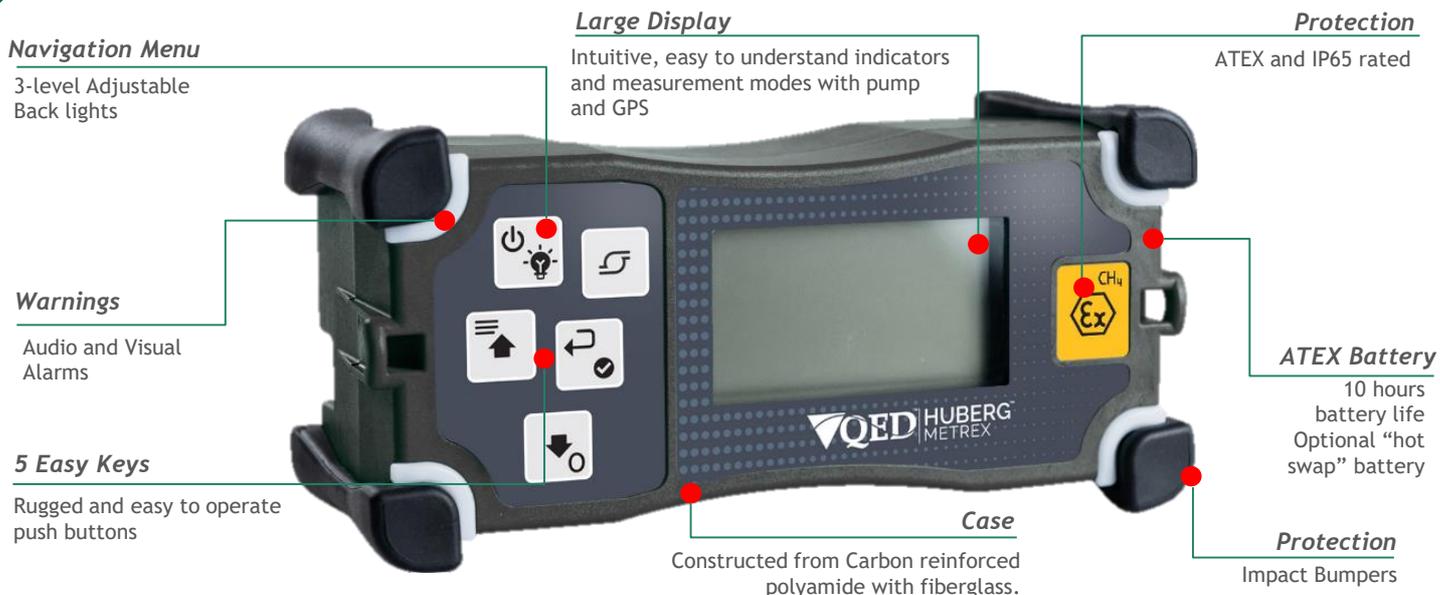

TECHNICAL SPECIFICATIONS

POWER SUPPLY			
Battery type	Li ion rechargeable, 3.7V-4000 mA/H	Battery charger	100-240V ATEX
Battery life	10 hours at 20°C/68°F (with backlight on)	Charge Time	4.5 hours from complete discharge
PUMP			
Flow	0.8 l/min / 800cc/min	Pump Type	Diaphragm Pump
FACILITIES			
VOL Alarm	User configurable alarm for ppm/VOL (100 - 1,000,000ppm)	Alarm Warnings	Audio and Visual Gas threshold and pump stopped
LEL Alarm	Two fixed alarms at 10% LEL and 50% LEL		
Communications	Bluetooth with optional ATEX USB with Communication Charger	External probe options (see next page)	
Response Time	Gas detection in 5 seconds	T90 = <8 seconds	
ENVIRONMENTAL CONDITIONS			
Operating Temperature	-30°C to +50°C / -22°F to 122°F	Operating / Storage humidity	<95% relative humidity non condensing
Storage Temperature	-40°C to +60°C / -40°F to 140°F		
Protection Class	IP65	Operational Pressure	800 mbar to 1,100 mbar 23.62”Hg to 32.48”Hg
PHYSICAL			
Weight	1.3 kg / 2.9 lbs (in operation)	Size (L x W x H)	230 x 97.5 x 110 mm 9.06”x 3.84 ”x 4.33”
Case material	Carbon reinforced polyamide with fiberglass	Keys	“Tactile” soft membrane push buttons
Display	Liquid Crystal Display	Display (L x H)	86 x 47 mm / 3.39” x 1.85”
Sample Filters	25mm PTFE 0.45um dust and water filter (H-201272)	Connections	Push lock quick connect tube coupler
CERTIFICATION RATING			
ATEX	II 2G Ex db ib IIB T4 Gb EN 60079-29-1	Gas calibration test	Certified cylinder with H-100157 Quicktest kit
Calibration	12 months by QED or authorised QED service and repair center complying with ISO standards		

INSTRUMENT OPTIONS

Model Name	Part Number	Gases	PPM Range	LEL Range	VOL Range	Accuracy
Metrex 4001	H-M400100[LNG]	CH ₄ - Methane	0 - 10,000PPM	0 - 100% LEL	0 - 100% v/v	+/-10% relative to reading
Metrex 4002	H-M400200[LNG]	C ₃ H ₈ - Propane	0 - 10,000PPM	0 - 100% LEL	0 - 100% v/v	+/-10% relative to reading
Metrex 4003	H-M400300[LNG]	CH ₄ - Methane C ₃ H ₈ - Propane	0 - 10,000PPM	0 - 100% LEL	0 - 100% v/v	+/-10% relative to reading
NOTE: CH ₄ / C ₃ H ₈ minimum threshold = 100PPM						
METREX 4001 Package	H-M400101[LNG]	Includes: ATEX Mains Charger, 12 V Car battery charger Carry Case and Strap Filter Kits (water and dust) Multifunctional Probe Kit: Wide mouthed telescopic sampling probe, flexible neck probe and bar hole sampling probe				
METREX 4002 Package	H-M400102[LNG]	Includes: ATEX Mains Charger, 12 V Car battery charger Hard Carry Case Carry Case and Strap Filter Kits (water and dust) Multifunctional Probe Kit: Universal telescopic probe, flexible neck probe, bar hole sampling probe, and 45° sampling probe				
Language Options [LNG]	EN - English IT - Italian DE - German FR - French ES - Spanish NL - Dutch PL - Polish Example: Metrex 4001 instrument configured with Spanish Operation menus Order part number H-M400100ES					

METREX ACCESSORIES

H-107045 Hard Carry Case for Huberg instruments, charger and accessories 	H-102010 12 v Car Charger used with H-100190 charging base 
H-107048 Carry Pouch with waist strap, 170cm, for METREX and LASER ONE. 	H-102049 ATEX Hot Swap Battery Pack 4000mA/Hr. Supplied with M3x 65mm Allen Key 
H-M4-S001 Charger with USB Communication Port 100 to 240 VAC/50-60 Hz for use with METREX 4 only Power Plug EU; US; GB 	H-M4-S002 Charger without Communication Port 100 to 240 VAC/50-60 Hz for use with METREX only Power Plug EU; US; GB 
H-201261 Pack of 25 Acetate dust filters for use with probes 	H-201272 Pack of 10 Anti Water Filter Kits. 25mm PTFE 0.45um 
H-100157 Quicktest Bump Test gas verification kit. Compatible with most disposable cylinders. 	H-4091016 2 Point, 30mm Synthetic Carry Strap for METREX gen 4 and LASER ONE. 

PROBE KITS FOR USE WITH METREX INSTRUMENTS

H-900011 Universal telescopic probe with medium mouthed air sampling bell.		H-100011 Universal telescopic probe with wide mouthed rubber air sampling bell.		H-100058 Solid stem wide mouthed suction probe with PTFE suction tubing, anti-water filter and wide mouthed air sampling bell.	
H-100057 Bar hole sampling probe with suction tubing and anti-water filter.		H-100059 Handle air sampling probe with flexible neck. Water and dust filter inside probe tip. Includes PTFE tubing.		H-100060 Huberg carpet probe.	
H-102035 Pack of 10 sintered brass filters used with sample probe bell kits.		H-100176 Telescopic handle H-100173 adaptor with quick-coupling to fit PTFE nylon tube.		H-100177 45° angled sampling probe to fit telescopic handle H-100173.	
H-100012 Wide Mouthed Rubber Bell Cone. Use with probes: H-100173 & H-100058. Includes Acetate filter housing and polyurethane tubing.		H-100175 Bar hole sampling accessory probe to fit telescopic handle H-1001.		H-100173 Telescopic probe handle.	

PROSoft Software for use in Mains Gas Leak Detection

Part Number	H-707060P
Licence Type	Perpetual
Map Updates	✓
.shp & OSM Files	✓
Users	Single
Live Connect to PC	✓
Data Download	✓
Debugging	✓
Technical Support	✓
Software Updates	✓

Software developed for the Gas Distribution Network Operator (DNO)

PROSoft integrates with the METREX

DNO's using these instruments can acquire the following data

- Data linked by time
- Geographic location
- Detected gas levels

Visualise Hard Data

Customisable graphical view of leak detection surveys where the recorded data are shown overlaid on Open Street Map views. DNO digital cartographies can easily be overlaid

- Detailed street views
- Locations of pipe network
- GPS points surveyed

Operators can visualise their complete survey and see where leaks occur relative to gas infrastructure and plan.

Realtime Connection and Communication

Data exported into various spatial formats, KMZ, ESRI & .shp